



# SMAF Tape and Reel Data

## 1. SMAF Packing Configuration:

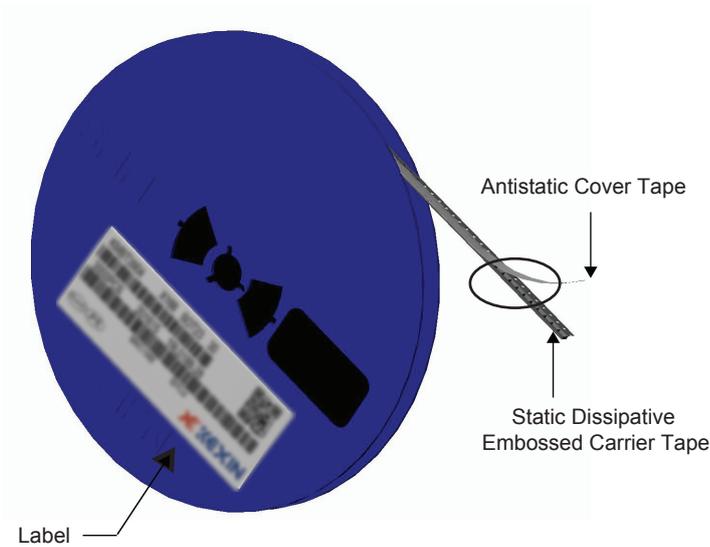


### Packaging Description

SMAF parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, Adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.7cm diameter reel. One box contains seven reels maximum. And these boxes are placed inside a barcode labeled shipping box which comes in different sizes depending on the number of parts shipped.

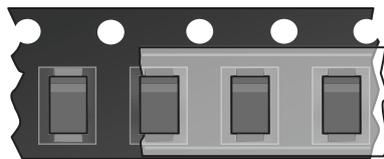


182mm x 182mm x 135mm  
Inner box(7 Reels per box)

## 2. SMAF Tape Leader and Trailer Configuration:

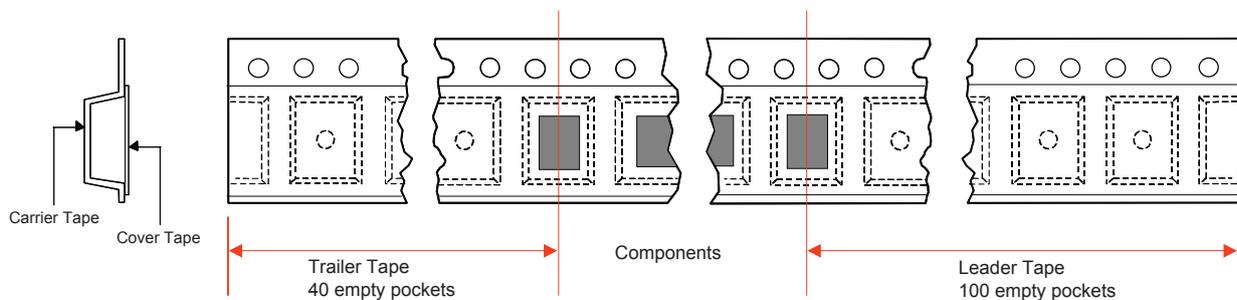


# SMAF Tape and Reel Data

## 3. SMAF Embossed Carrier Tape Configuration:

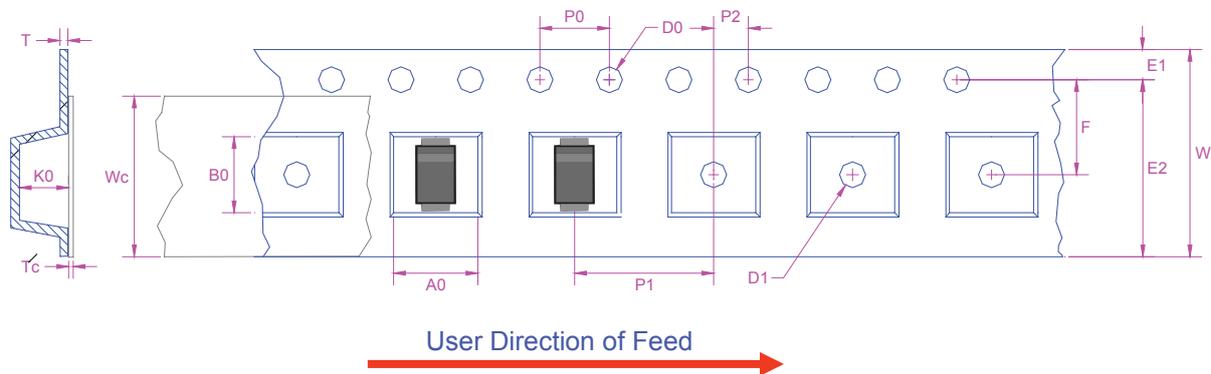

Dimension are in millimeter															
Pkg type	A0	B0	W	D0	D1	E1	E2	F	P2	P1	P0	K0	T	Wc	Tc
SMAF	2.93 +/-0.10	5.33 +/-0.10	12.0 +/-0.3	1.55 +0.05	1.50 +0.05	1.75 +/-0.10	10.25 min	5.50 +/-0.05	2.0 +/-0.05	4.0 +/-0.1	4.0 +/-0.1	1.33 +/-0.10	0.2 +/-0.03	9.3 +/-0.1	0.05 +/-0.02

## 4. SMAF Reel Configuration:

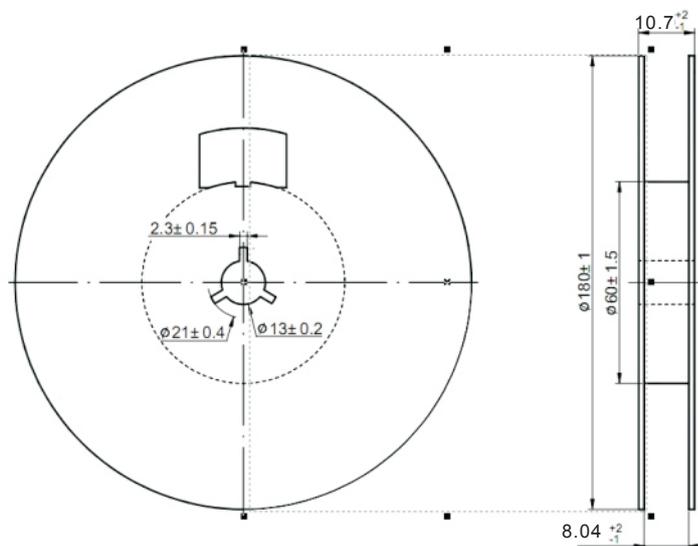

NOTES:  
ALL DIMENSION ARE IN MILLIMETERS UNLESS  
OTHERWISE SPECIFIED